

**Marden**<sup>®</sup>  
INDUSTRIES INC.



## **Minimum Till CRP 122**

### **Lift-Type Sub-Soil Plow**

Marden's new minimum tillage sub-soil plow is designed to maintain a sub-soil depth of up to 18" while contouring upland sites. With a narrow low bed, this plow virtually eliminates erosion while giving row delineation for planting. The CRP122 plow is perfect for the mid-range tractors such as the CAT D5M or JD 700H.

**Call 1-800-881-0388**

**863-682-7882 • Fax: 863-428-1395**

E-Mail: [mardenind@mindspring.com](mailto:mardenind@mindspring.com) • <http://www.mardenind.com>

P.O. Box 796 • Mulberry, FL. 33860 • USA



**Marden "Middle-Buster" Plows™**



## Specifications


Weight	5,200 lbs.
Overall Length	127 inches
Overall Width	55 inches
Bed Width	30 inches
2 Arm Design w/subsoil shank & coulter	
Blades	10mm X 28 inches

**Marden**<sup>®</sup>  
INDUSTRIES INC.

**Call 1-800-881-0388**

**863-682-7882 • Fax: 863-428-1395**

E-Mail: [mardenind@mindspring.com](mailto:mardenind@mindspring.com) • <http://www.mardenind.com>  
P.O.Box 796 • Mulberry, FL. 33860 • USA

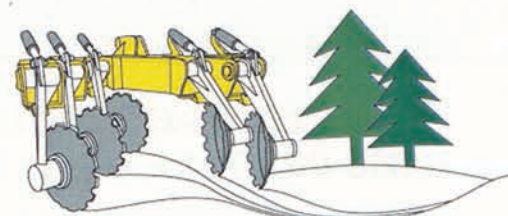

**Marden "Middle-Buster" Plows™**